

# R5

## 5" Shallow Recessed Incandescent Housing

### New Construction Non-IC

Catalog Number: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_



#### Description

For new construction with installations of vertical clearance restrictions. Thermally protected, economy, shallow recessed housing. Furnished with pre-installed BH6 SURE-LOK® adjustable bar hangers. Breakaway plaster frame provides remodel capability. Fixture is UL Listed for Through-Branch Circuit Wiring and Damp Location use.

#### Features

- Compact size permits installation with 2" x 6" joist construction, and as close as 8" on center.
- Non-IC - 75W Maximum
- Plaster frame detachable from housing for use as remodel housing.
- Pre-installed BH6 SURE-LOK® bar hangers included.
- Thermal protection standard.
- UL Listed for Through-Branch Circuit Wiring and Damp Locations.

### CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: R5-R238

#### Housing

#### Trims (choose one)

R5

**R238** Black Baffle\*  
**R238W** White Baffle\*  
**R249C** Specular Clear Reflector\*  
**R249G** Gold Reflector\*  
**R249BK** Black Reflector\*  
**R132W** White Open Trim\*  
**R132PB** Polished Brass Open Trim\*  
**R120W** White Reflector Cone\*  
**R120** Black Reflector Cone\*  
**R136** Drop Round Shower Trim  
**R135** Albalite Shower Trim  
**R133W** PAR30 Eyeball White  
**R133PB** PAR30 Eyeball Polished Brass

**R133BRN** PAR30 Eyeball Brushed Nickel  
**R138BK** PAR20 Eyeball White w/ Black Baffle  
**R138W** PAR 20 Eyeball White w/White Baffle  
**R138PB** PAR 20 Eyeball White w/White Baffle  
**R221** White Eyeball  
**R221PB** Polished Brass Eyeball  
**R248** Wall Wash\*  
**R134W** Recessed Gimbal White Baffle\*  
**R134BK** Recessed Gimbal Black Baffle\*  
**R134WHT** Recessed Gimbal White Reflector\*

**R134C** Recessed Gimbal Clear Reflector\*  
**R134PB** Recessed Gimbal Polished Brass Reflector\*  
**R134BRN** Recessed Gimbal Brushed Nickel Reflector\*  
**R139W** Surface Gimbal Clear Reflector\*  
**R139PB** Surface Gimbal Polished Brass Reflector\*  
**R139BRN** Brushed Nickel Surface Gimbal\*

Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

\*Bracket required for these trims.

### SPECIFICATIONS

1. **Housing** - 22 gauge steel painted white. Adjusts vertically in plaster frame to accommodate ceilings 1/2" to 1-1/2" thick. Housing can be pulled through plaster frame for access to junction box. Accommodates lamps up to 75W depending on trim used. Ceiling opening 5-1/8". Fits 2" x 6" joist construction.

2. **Plaster Frame** - Die-formed galvanized steel, detachable from housing for use as remodel housing, installed through 5" hole from below ceiling.

3. **Socket** - Medium base screw shell porcelain socket, mounted to fixed bracket in top of housing.

4. **Bar Hangers** - Patented SURE-LOK® BH6 bar hangers telescope from 16" to 24". Vertical design of interlocking bar hangers prevents sagging even at full 24" extension. Bar hangers mount vertically on long axis of plaster frame.



5. **Junction Box** - Extra-large 32 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" conduit. Meets all safety requirements of UL and N.E.C.

6. **Non-IC** - Insulation must be kept three inches away from housing in Non-IC applications.

7. **Thermal Protection** - Standard thermal protection device inside housing automatically takes fixture out of service if temperature becomes excessive from overlamp-ing, or wrong lamp/trim combination.

8. **c/UL Listed** for Damp Locations and Through Branch Circuit Wiring, 4 in/4 out.

### DIMENSIONS

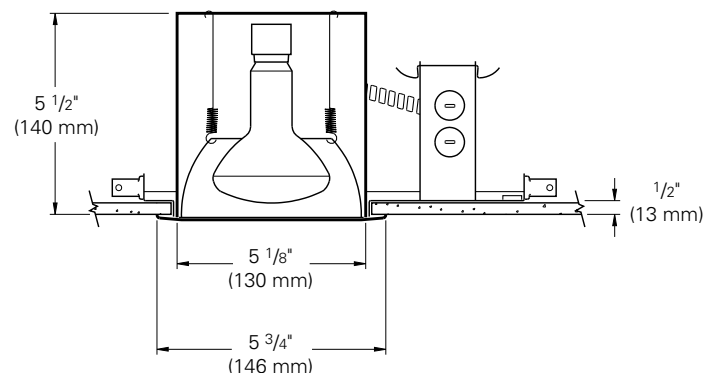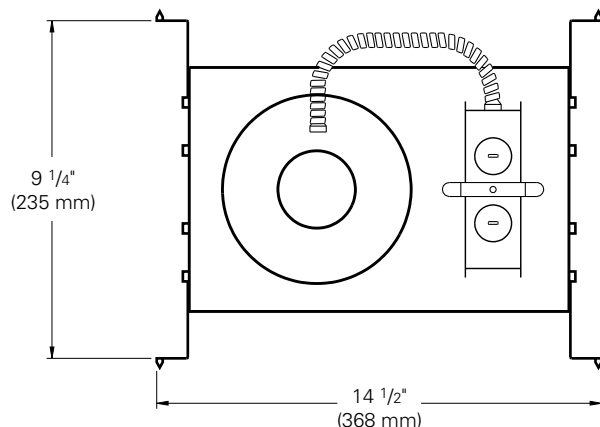

REV. 01/08

# 5" TRIMS



**R238** (Shown)  
Black Baffle Trim

**R238W** White Baffle Trim  
Bracket Required  
5 3/4" O.D. (146 mm)


Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	PAR30L	75W	75W
CRR5	R30	75W	75W
R5	PAR20	50W	
	PAR30	75W	
	R30	75W	



**R249C** (Shown)  
Specular Clear Reflector

**R249G** Gold Reflector  
**R249BK** Black Reflector  
Bracket Required  
5 3/4" O.D. (146 mm)


Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



**R132W** (Shown)  
White Open Trim

**R132PB**  
Polished Brass Open Trim  
Bracket Required  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	75W	75W
CR5	R30	75W	75W
CRR5			
R5	PAR30	75W	
	R30	75W	



**R120W** (Shown)  
White Reflector Cone

**R120**  
Black Reflector Cone  
Bracket Required  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



**R136**  
Drop Round Shower Trim  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	A19		60W
CR5	PAR30	50W	75W
CRR5			
R5	A19		60W
	PAR30		75W



**R135**  
Albalite Shower Trim  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	Non-IC
QL5	A19	60W
CR5	PAR30	75W
CRR5		
R5	A19	40W



**R133W** (shown)  
White Par 30 Eyeball

**R133PB**  
Par 30 Eyeball Polished Brass  
**R133BRN**  
Par 30 Eyeball Brushed Nickel  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



**R138BK**  
Par 20 Eyeball (shown)

**R138W**  
Par 20 Eyeball  
White with White Baffle  
**R138PB**  
Par 20 Eyeball  
Polished Brass with Black Baffle  
Socket Supporting

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5			
CRR5			
R5	PAR20	50W	



**R221**  
White Eyeball

**R221PB**  
Polished Brass Eyeball  
Socket Supporting  
7" O.D. (178 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	PAR20	50W	
	R20	50W	



**R248**  
Wall Wash  
Bracket Required  
5-3/4" O.D. (146 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5			
R5	R20	50W	



**R139W** (shown)  
Surface Gimbal, Clear Reflector

**R139PB**  
Surface Gimbal,  
Polished Brass Reflector  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



**R134W** (shown)  
Recessed Gimbal, White Baffle

**R134BK**  
Recessed Gimbal, Black Baffle  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	



**R134WHT** (shown)  
Recessed Gimbal, White Reflector

**R134C**  
Recessed Gimbal, Clear Reflector

**R134PB**  
Recessed Gimbal, Polished Brass Reflector

**R134BRN** Recessed Gimbal Brushed Nickel Reflector  
Socket Supporting  
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5			
CRR5			
R5	PAR30	75W	

Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice.©2008

\* Canadian product offering specifications and wattages may vary from those shown.

This product may be covered by one or more of the following U.S. Patents: #4,408,262, #4,703,406, #4,723,747, #4,910,651, #5,057,979. Other U.S. or Foreign Patents may apply.

**RC1-10**

**CAPRI LIGHTING:**  
776 South Green St., Tupelo, MS 38804  
Phone 662.842.7212 FAX 662.841.5501  
[www.caprilighting.com](http://www.caprilighting.com)

**CANADIAN DIVISION:**  
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4  
Phone 905.294.9570 FAX 800.268.0003

**capri**  
LIGHTING