


# 3ARIC

3" Micro IC Rated/Airseal™ Rec. Downlight - Line Voltage

Catalog Number: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_

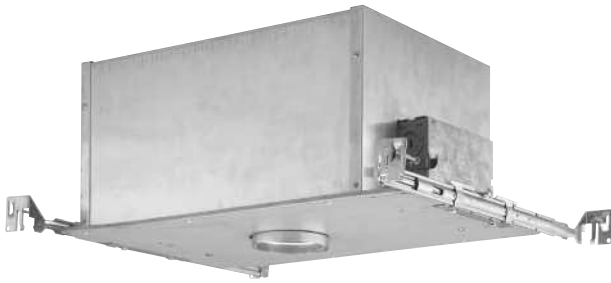

### Description

Thermally protected small aperture line voltage recessed housing for use with up to 35 watt PAR16 GU10 base lamp. Housing is rated for direct contact with thermal insulation.

### Features

- Housing adjusts vertically to accommodate variations in ceiling thickness.
- Snap in socket easily attaches to lamp.
- 120V PAR16 GU10 35 watt maximum.
- Provided with BH1 bar hangers pre-installed.
- cUL listed for damp locations and through branch circuit wiring.
- AirSeal™ rated to ASTM E283.



## CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: 3ARIC-3A65WH

Housing	Trims (choose only one)	3A70SB	3A50WH	3A30BRZ	3A30BRN	3A55WHSL	3A55BK	3A55BRZSL	3A55BRNSL	3A10WHT	3A10BRN	3A10BK
3ARIC	3A65WH Baffle White w/White Flange	3A70BRZSL Bronze Reflector w/Bronze Flange	3A50BK Satin Brass Reflector w/White Flange	3A30BRZ Bronze Eyeball	3A30BRN Brushed Nickel	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A65BK Baffle Black w/White Flange	3A70CPRSL Copper Reflector w/Copper Flange	3A50SBS Satin Brass Slot	3A30BRN Brushed Nickel Slot	3A30BRN Black Baffle	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A65BRZSL Baffle Bronze w/Bronze Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50CPR Copper Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A65BKSL Baffle Black w/Black Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A70CLR Clear Reflector w/White Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A70GLD Gold Reflector w/White Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A70BK Black Reflector w/White Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A70BKSL Black Reflector w/Black Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange
	3A70BKSL Black Reflector w/Black Flange	3A70BRNSL Brushed Nickel Reflector w/Brushed Nickel Flange	3A50BRZ Dark Bronze Reflector w/White Flange	3A30BRZ White Baffle	3A30BRN Wall Wash	3A55WHSL White Pinhole w/White Flange	3A55BK Black Pinhole w/Black Flange	3A55BRZSL Bronze Pinhole w/Bronze Flange	3A55BRNSL Brushed Nickel Pinhole w/Brushed Nickel Flange	3A10WHT Drop Glass Shower w/White Flange	3A10BRN Drop Glass Shower w/Brushed Nickel Flange	3A10BK Drop Glass Shower w/Black Flange



### General Notes:

See Trims on reverse side of the sheet for lamp compatibility. Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

## SPECIFICATIONS

- Inner Housing** - Deep drawn 20 gauge steel single piece housing. Adjusts vertically in frame to accommodate ceiling thickness from 1/2" to 1" thick. Ceiling opening 3-3/8". Accommodates lamp up to 35 watts. Plaster frame is stamped 20 gauge galvanized steel.
- Outer Housing** - 20 gauge galvanized steel and is rated for direct contact with ceiling insulation.
- Socket** - Porcelain body twist and lock GU10 Base. Pre-wired with 18 gauge teflon 250 degree leads to junction box.
- Bar Hangers** - Pre-installed BH1 bar hangers telescope from 16 to 24 inches. Alignment holes provided to center fixture on 14, 16 and 24 inch centers. Bar hangers are equipped with heavy duty fluted rails. Interlocking support tabs provide smooth adjustment of bar hanger.
- Junction Box** - Large 16 gauge galvanized steel with snap-on cover and grounding pigtail. Knock-outs for 1/2" and 3/4" conduit. Integral cable clamp permits attachment of non-metallic Romex without the need of additional connectors. Meets all safety requirements of UL and N.E.C.
- Thermal Protection** - Standard thermal protection device inside housing automatically takes the fixture out of service if temperature becomes excessive from overlamp-ing or using the wrong lamp /trim combination.
- cUL Listed** - Certified for a maximum of 6 No.14 ga. 90 degree C through branch wiring conductors. Meets all safety requirements of UL and N.E.C. Above ceiling access required.

## DIMENSIONS

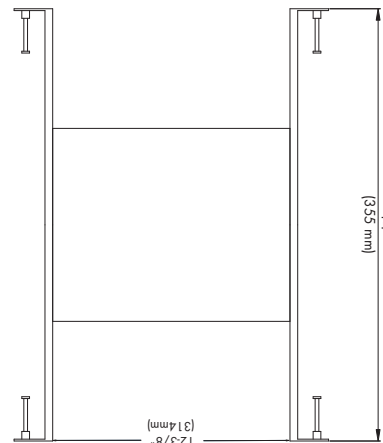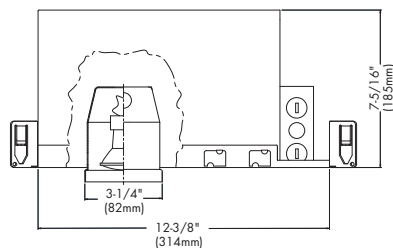

REV. 01/08

3" MICRO TRIMS - NEW CONSTRUCTION - IC RATED



**3A65WH** (Shown)  
White Baffle w/White Flange  
**3A65BK**  
Black Baffle w/ White Flange  
**3A65BRZSL**  
Bronze Baffle w/Bronze Flange  
**3A65BKSL**  
Black Baffle w/Black Flange

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A70CLR** (Shown)  
Clear Reflector w/White Flange  
**3A70GLD**  
Gold Reflector w/White Flange  
**3A70BK**  
Black Reflector w/White Flange  
**3A70BKSL**  
Black Reflector w/Black Flange  
**3A70SB**  
Satin Bronze Reflector w/White Flange  
**3A70BRZSL**  
Bronze Reflector w/Bronze Flange  
**3A70CPRSL**  
Copper Reflector w/Copper Flange  
**3A70BRNSL**  
Brushed Nickel Reflector w/Brushed Nickel Flange

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A45WH** (Shown)  
White Gimbal  
**3A45BK**  
Black Gimbal  
**3A45CPR**  
Copper Gimbal  
**3A45BRZ**  
Bronze Gimbal  
**3A45BRN**  
Brushed Nickel Gimbal  
**3A45SB**  
Satin Brass Gimbal

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A50WH**  
White Slot  
**3A50BK**  
Black Slot  
**3A50SB**  
Satin Brass Slot  
**3A50CPR**  
Copper Slot  
**3A50BRZ**  
Bronze Slot  
**3A50BRN**  
Brushed Nickel Slot

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A20BKSL** (Shown)  
Wall Wash Black Baffle w/Black Flange  
**3A20BK**  
Wall Wash Black Baffle w/White Flange  
**3A20WH**  
Wall Wash White Baffle w/White Flange  
**3A20BRN**  
Wall Wash Brushed Nickel w/Brushed Nickel Flange  
**3A20BRZSL**  
Wall Wash Bronze w/Bronze Flange

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A30CPR** (Shown)  
Copper Eyeball  
**3A30WH**  
White Eyeball  
**3A30BK**  
Black Eyeball  
**3A30BRZ**  
Bronze Eyeball  
**3A30BRN**  
Brushed Nickel Eyeball

20° Vertical Lamp Tilt  
4" O.D. (101 mm)  
35WGU10 PAR16



**3A55BRZSL** (Shown)  
Bronze Pinhole w/Bronze Flange  
**3A55WHSL**  
White Pinhole w/White Flange  
**3A55BKSL**  
Black Pinhole w/Black Flange  
**3A55BRNSL**  
Brushed Nickel Pinhole w/Brushed Nickel Flange

35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
35WGU10 PAR16



**3A10BRN** (Shown)  
Drop Glass w/Brushed Nickel Trim  
**3A10WH**  
Drop Glass w/White Trim  
**3A10BK**  
Drop Glass w/Black Trim  
35° Vertical Lamp Tilt  
3-5/8" O.D. (92 mm)  
25WGU10 PAR16  
ETL Wet Location Listed  
in Covered Ceilings

**2" Color Filters for MR16**

CF1	Clear Lens
CF2	Spread Lens
CF3	Medium Blue Filter
CF4	Medium Red Filter
CF5	Medium Green Filter
CF7	Yellow Filter
CF8	Pink Filter
CF9	Linear Spread
CF10	UV Filter
CF11	Frosted Lens
CF12	Medium Amber Filter
CLO	2" Honeycomb Louver

Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice.©2008

**RC1-2**

**CAPRI LIGHTING:**  
776 South Green St., Tupelo, MS 38804  
Phone 662.842.7212 FAX 662.841.5501  
[www.caprilighting.com](http://www.caprilighting.com)

**THOMAS LIGHTING CANADA:**  
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4  
Phone 905.294.9570 FAX 800.268.0003  
[www.thomaslightingcanada.com](http://www.thomaslightingcanada.com)

**capri**  
LIGHTING