

CR5 & CR5QP & CR5NBQP & CR5NB

5" Recessed Incandescent Housing
New Construction - IC and Non-IC/AirSeal™

Catalog Number: _____

Type: _____

Project: _____



Description

For new construction. Thermally protected, labor savings recessed housing. Adjustable socket mounting plate. Fixture suitable for direct contact of ceiling insulation and is AirSeal™ rated. For higher wattage lamps, ceiling insulation must be a minimum of three inches from recessed fixture.

Features

- Housing adjusts vertically in plaster frame to allow for variations in ceiling thickness.
- Pre-installed bar hangers included.
- Wide variety of trims.
- Housing is constructed of painted white aluminum for improved heat dissipation.
- IC - 75 W Maximum, Non-IC - 75W Maximum
- Thermal protection standard.
- UL Listed for Through-Branch Circuit Wiring and Damp Locations.
- AirSeal rated to ASTM E283.



CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: CR5NB-R134C

Housing **Trims (choose one)**

CR5
CR5QP
CR5NBQP
CR5NB

R238 Black Baffle*
R238W White Baffle*
R240 Black Baffle
R240W White Baffle
R130C Specular Clear Reflector
R130BK Black Reflector
R130G Gold Reflector
R130W White Reflector
R249C Specular Clear Reflector*
R249G Gold Reflector*
R249BK Black Reflector*
R132W White Open Trim*
R132PB Polished Brass Open Trim*
R120W White Reflector Cone*
R120 Black Reflector Cone*

R136 Drop Round Shower Trim
R135 Albalite Shower Trim
R133W PAR30 Eyeball White
R133PB PAR30 Eyeball Polished Brass
R133BRN PAR30 Eyeball Brushed Nickel
R138BK PAR20 Eyeball White w/ Black Baffle
R138W PAR 20 Eyeball White w/White Baffle
R138PB PAR 20 Eyeball White w/White Baffle White Eyeball
R221 White Open Trim*
R221PB Polished Brass Eyeball
R248 Wall Wash*
R134W Recessed Gimbal White Baffle*
R134BK Recessed Gimbal Black Baffle*

R134WHT Recessed Gimbal White Reflector*
R134C Recessed Gimbal Clear Reflector*
R134PB Recessed Gimbal Polished Brass Reflector*
R134BRN Recessed Gimbal Brushed Nickel Reflector*
R139W Surface Gimbal Clear Reflector*
R139PB Surface Gimbal Polished Brass Reflector*
R139BRN Surface Gimbal Brushed Nickel*
5B30 Black Baffle
5B30W White Baffle
5B101 Clear Reflector with Black Baffle
5B101W Clear Reflector with White Baffle
5A100C Clear Multiplier
5A100G Gold Multiplier

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

*Bracket required for these trims.

SPECIFICATIONS

- Housing** - Constructed of painted white .032 aluminum. Adjusts vertically in plaster frame to accommodate ceilings 1/2" to 1-1/2" thick. Housing can be pulled through plaster frame for access to junction box. Accommodates lamps up to 75 watts, depending on trim used and application to direct contact of ceiling insulation. Ceiling opening of 5-5/16".
- Plaster Frame** - Die-stamped 22 gauge galvanized steel.
- Socket** - Medium base screw shell porcelain socket, mounts with snap in clips to adjustable socket holder. Stepless adjustable socket holder, retained by single wingnut, adjusts vertically to accommodate a wide variety of lamp and trim options.


- Bar hangers** - Pre-installed BH1 SURE-LOK® bar hangers telescope from 14 to 24 inches. Bar hangers are tabbed preventing fall out from fixture.
- IC & Non-IC** - Housing is UL Listed for direct contact with thermal insulation. For Non-IC applications higher wattages maybe used. Insulation must be kept three inches away from housing in Non-IC applications.
- Junction Box** - Extra-large 32 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" and 3/4" conduit and 4 Romex knockouts with strain relief. Meets all safety requirements of UL and the N.E.C.

- Thermal Protection** - Standard thermal protection device inside housing automatically takes fixture out of service if temperature becomes excessive from contact with insulation, overlampping, or wrong lamp/trim combination.
- UL Listed** for damp locations and Through Branch Wiring, 4 in/4 out.
- AirSeal** rated to ASTM E283.

Options

Quick Plug.....QP

DIMENSIONS

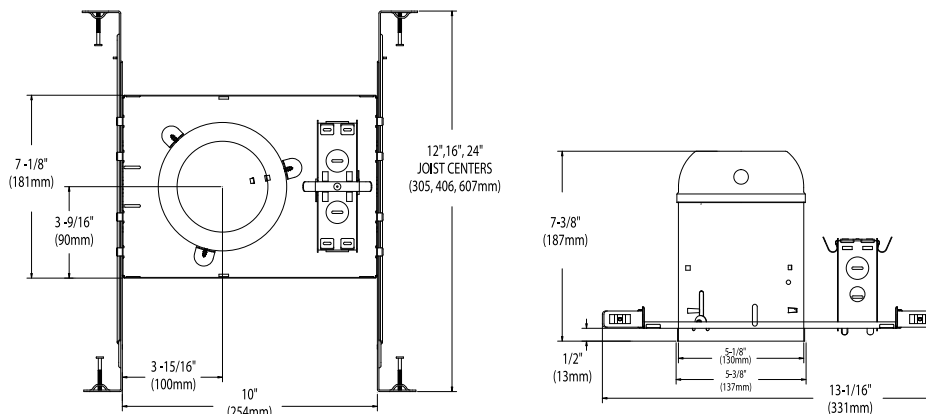

REV. 01/08

5" TRIMS



R238 (Shown)
Black Baffle Trim

R238W White Baffle Trim

Bracket Required
5 3/4" O.D. (146 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	PAR30L	75W	75W
CRR5	R30	75W	75W
R5	PAR20	50W	
	PAR30	75W	
	R30	75W	



R240 (shown)
Black Baffle Trim

R240W
White Baffle Trim

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	75W
CR5	R30	75W	
CRR5	BR30	75W	



R130C (Shown)
Specular Clear Reflector

R130BK Black Reflector

R130G Gold Reflector

R130W White Reflector

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5	R30	50W	75W
CRR5	R30	50W	75W



R249C (Shown)
Specular Clear Reflector

R249G Gold Reflector

R249BK Black Reflector

Bracket Required
5 3/4" O.D. (146 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5	R20	50W	50W
R5	PAR20	50W	
	R20	50W	



R132W (Shown)
White Open Trim

R132PB
Polished Brass Open Trim

Bracket Required
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	75W	75W
CR5	R30	75W	75W
CRR5	R30	75W	75W
R5	PAR30	75W	
	R30	75W	



R120W (Shown)
White Reflector Cone

R120
Black Reflector Cone

Bracket Required
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5	R20	50W	50W
R5	PAR20	50W	
	R20	50W	



R136
Drop Round Shower Trim

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	A19	60W	
CR5	PAR30	50W	75W
CRR5	PAR30	50W	75W
R5	A19	60W	
	PAR30	75W	



R135
Albalite Shower Trim

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	Non-IC
QL5	A19	60W
CR5	PAR30	75W
CRR5	PAR30	75W
R5	A19	40W




R133W (shown)
White Par 30 Eyeball

R133PB
Par 30 Eyeball Polished Brass

R133BRN
Par 30 Eyeball Brushed Nickel

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5	PAR30	50W	75W
CRR5	PAR30	50W	75W
R5	PAR30	75W	

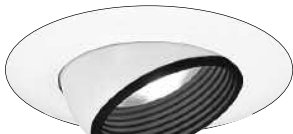

R138BK
Par 20 Eyeball (shown)

R138W
Par 20 Eyeball
White with White Baffle

R138PB
Par 20 Eyeball
Polished Brass with Black Baffle

Socket Supporting

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	PAR20	50W	50W
CRR5	PAR20	50W	50W
R5	PAR20	50W	



R221
White Eyeball

R221PB
Polished Brass Eyeball

Socket Supporting
7" O.D. (178 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5	R20	50W	50W
R5	PAR20	50W	
	R20	50W	



R248
Wall Wash

Bracket Required
5-3/4" O.D. (146 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR20	50W	50W
CR5	R20	50W	50W
CRR5	R20	50W	50W
R5	R20	50W	



R139W (shown)
Surface Gimbal, Clear Reflector

R139PB
Surface Gimbal,
Polished Brass Reflector

R134BRN Recessed Gimbal
Brushed Nickel Reflector

Socket Supporting
6-3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5	PAR30	50W	75W
CRR5	PAR30	50W	75W
R5	PAR30	75W	



R134W (shown)
Recessed Gimbal, White Baffle

R134BK
Recessed Gimbal, Black Baffle

Socket Supporting
6-3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5	PAR30	50W	75W
CRR5	PAR30	50W	75W
R5	PAR30	75W	



R134WHT (shown)
Recessed Gimbal, White Reflector

R134C
Recessed Gimbal, Clear Reflector

R134PB
Recessed Gimbal, Polished Brass Reflector

R134BRN Recessed Gimbal Brushed Nickel Reflector

Socket Supporting
6 3/8" O.D. (162 mm)

Housing	Lamp	IC	Non-IC
QL5	PAR30	50W	75W
CR5	PAR30	50W	75W
CRR5	PAR30	50W	75W
R5	PAR30	75W	

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice. ©2008