

RR4 with Square Trims

4" Recessed Incandescent Housing

Remodel Construction

Catalog Number: _____

Type: _____

Project: _____



Description

For remodel construction. Thermally protected recessed housing. For fast installation in existing plaster or mechanical ceilings from 1/2" to 1-1/2" in thickness. Junction box is provided with 1/2" conduit knockouts. Fixture is UL Listed for through-branch circuit wiring and damp location use.

Features

- Compact size permits installation with 2" x 6" joist construction.
- 75W maximum.
- Pre-installed spring clips secure housing firmly into the ceiling.
- Wide variety of square trims.
- Thermal protection standard.
- UL Listed for through-branch circuit wiring and damp locations.
- Non-IC applications.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: RR4-R451W

Housing

RR4

Trims

- LCI31 – square adjustable gimbal, black baffle w/white trim¹
- LCI31W – square adjustable gimbal white baffle w/white trim¹
- LCI32 – square adjustable gimbal clear cone w/white trim¹
- LCI33 – square adjustable gimbal gold cone w/white trim¹
- LCI34 – square adjustable gimbal black cone w/white trim¹
- LCI34M1 – square adjustable gimbal black cone w/brushed nickel trim¹
- LCI34M2 – square adjustable gimbal black cone w/chrome trim¹
- LCI36 – square adjustable gimbal white cone w/white trim¹
- LCI36M1 – square adjustable gimbal white cone w/brushed nickel trim¹
- LCI36M2 – square adjustable gimbal white cone w/chrome trim¹
- LCI37SL – square adjustable gimbal brushed nickel cone w/brushed nickel trim¹

R451

R451W

R452

R453

R454

R456

R457SL

- square adjustable black baffle w/white trim²
- square adjustable white baffle w/white trim²
- square adjustable clear cone w/white trim²
- square adjustable gold cone w/white trim²
- square adjustable black cone w/white trim²
- square adjustable white cone w/white trim²
- square adjustable brushed nickel cone w/brushed nickel trim²

Footnotes:

1. PAR 20 only.
2. Available with PARI 6 & PAR 20.

General Notes:



See back of sheet for housing, lamp and louver compatibility.
Custom colors are available on select trims. Please visit www.caprilighting.com for further details.

SPECIFICATIONS

Specifications

- Housing** - Deep drawn single piece housing, painted black. For fast installation in existing recessed or mechanical ceilings. Will accommodate ceilings 1/2" to 1-1/2" thick. Accommodates lamps up to 55 watts, depending on trim used. Ceiling opening 4-1/4".
- Installation** - For installation from below finished ceiling.
- Socket** - Snap-in socket pre-installed in housing. Easily attached to trims by depressing mounting clips and snapping into socket yoke on trims.
- Junction Box** - 17 cubic inch 20 gauge steel with snap-on cover and grounding pigtail. Knockouts for 1/2" conduit. Meets all safety requirements of UL and the N.E.C.
- Square Trims** - Trims are die-cast aluminum for superior durability and heat dissipation. Adjustable lamp aiming up to 25°. Durable powder coat and plated finishes will not fade or discolor.
- Thermal Protection** - Standard thermal protection device inside housing automatically takes fixture out of service if temperature becomes excessive from contact with insulation, overlampping, or wrong lamp/trim combination.
- cUL Listed** for damp locations and through branch wiring, 4 in/4 out.

DIMENSIONS

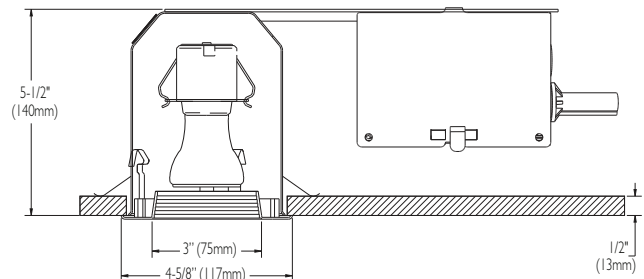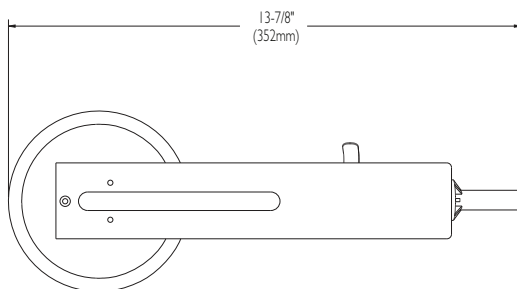

REV. 11/09

RR4 - 4" Square Trims



LC131
Adjustable gimbal white trim w/black baffle
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC131W
Adjustable gimbal white trim w/white baffle
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC132
Adjustable gimbal white trim w/ clear cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC133
Adjustable gimbal white trim w/ gold cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC134
Adjustable gimbal white trim w/ black cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC134M1
Adjustable gimbal brushed nickel trim w/black cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC134M2
Adjustable gimbal chrome trim w/black cone
4-5/8" sq. (102 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC136
Adjustable gimbal white trim w/white cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC136M1
Adjustable gimbal brushed nickel trim w/white cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC136M2
Adjustable gimbal chrome trim w/white cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



LC137SL
Adjustable gimbal brushed nickel trim w/brushed nickel cone
4-5/8" O.D. (117 mm)

Housing	Lamp	Wattage
RR4	PAR16	55W



R451
Adjustable white trim w/black baffle
4-5/8" O.D. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R451W
Adjustable white trim w/ white baffle
4-5/8" O.D. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R452
Adjustable white trim w/clear cone
4-5/8" O.D. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R453
Adjustable white trim w/gold cone
4-5/8" O.D. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R454
Adjustable white trim w/black cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R456
Adjustable white trim w/white cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W



R457SL
Adjustable brushed nickel trim w/ brushed nickel cone
4-5/8" sq. (117 mm)

Housing	Lamp	Wattage
RR4	PAR20	50W
	PAR16	55W

Philips Capri reserves the right to make changes without notice.©2009