

LVITX with Square Trims

4" Miniature Non-IC Recessed Low Voltage Housing
Commercial New Construction

Catalog Number: _____

Type: _____

Project: _____



Description

Thermally protected, non-IC, low voltage housing. miniature frame-in housing with magnetic transformer for use with MR16 lamps up to 75 watts. To be used in accessible commercial ceilings only. furnished with BH6 bar hangers. Marked spacing, 3 ft. on center; 18 inches from wall. 1" spacing above housing.

Features

- New construction accessible commercial ceilings only.
- Frame-in housing with magnetic transformer and pre-wired junction box.
- For use with trims using MR16 12 volt lamps up to 75W.
- BH6 flat bar hangers standard.
- Thermal protection standard.
- cUL listed for through-branch circuit wiring and damp locations.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: LVITX-LC136

Housing

LVITX/120
LVITX/277

Trims (choose one)

- LCI31 – square adjustable gimbal, black baffle w/white trim
- LCI31W – square adjustable gimbal white baffle w/white trim
- LCI32 – square adjustable gimbal clear cone w/white trim
- LCI33 – square adjustable gimbal gold cone w/white trim
- LCI34 – square adjustable gimbal black cone w/white trim
- LCI34M1 – square adjustable gimbal black cone w/brushed nickel trim
- LCI34M2 – square adjustable gimbal black cone w/chrome trim
- LCI36 – square adjustable gimbal white cone w/white trim
- LCI36M1 – square adjustable gimbal white cone w/brushed nickel trim
- LCI36M2 – square adjustable gimbal white cone w/chrome trim
- LCI37SL – square adjustable gimbal brushed nickel cone w/brushed nickel trim

Accessories

(Ordered Separately)

TC-5

T-Bar Clips (set of 4)

LCL0 & LCL1

Louvers

CF2-12

Color Filters

General Notes:

1. See back for description & compatibility
2. Custom colors are available on select trims. Please visit www.caprilighting.com for further details.

SPECIFICATIONS



1. **Housing** - Deep drawn, single piece housing, painted black. For use with trims using up to 75 watt MR16 12 volt lamps. Ceiling opening 4-1/4". Fits 2" x 6" joist construction. Install with minimum 3 ft. on center spacing, minimum 18" from wall, and with 1" spacing above housing.
2. **Plaster Frame** - Die-stamped 22 gauge galvanized steel. Pre-installed BH6 bar hangers.
3. **Transformer** - Class H magnetic transformer encased in heat-dissipating aluminum housing attached to one side of junction box. Requires above ceiling access.
4. **Bar Hangers** - Patented BH6 SURE-LOK® bar hangers telescope from 16" to 24". Vertical design of interlocking bar hangers prevents sagging even at full 24" extension.
5. **Junction Box** - Extra-large 32 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" and 3/4" conduit. Meets all safety requirements of UL and the N.E.C.

6. **Thermal Protection** - Standard thermal protection device automatically takes fixture out of service if temperature becomes excessive from overlamping, contact with insulation, or wrong lamp/trim combination.

7. **Square Trims** - Trims are die-cast aluminum for superior durability and heat dissipation. Adjustable lamp aiming up to 45°. Durable powder coat and plated finishes will not fade or discolor.

8. **cUL listed** for marked spacing, damp locations and through branch circuit wiring, 4 in/4 out. I.B.E.W. union made.

DIMENSIONS

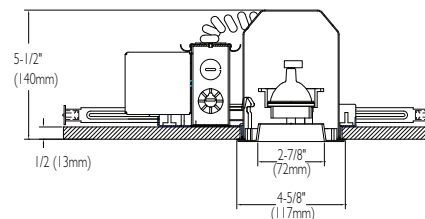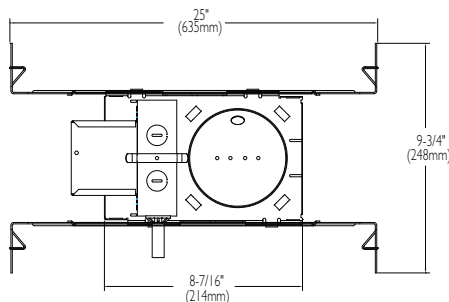

Lamp Wattage
(1) MR16 75W

REV. 11/09

PHILIPS
capri

776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.caprilighting.com

THOMAS LIGHTING CANADA:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 905.268.0003
www.thomaslightingcanada.com

RC4-21



LC131
Adjustable Gimbal Black Baffle w/
White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC131W
Adjustable Gimbal White Baffle w/
White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC132
Adjustable Gimbal Clear Cone w/
White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC133
Adjustable Gimbal Gold Cone
w/ White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC134
Adjustable Gimbal Black Cone
w/ White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC134M1
Adjustable Gimbal Black Cone w/
Brushed Nickel Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC134M2
Adjustable Gimbal Black Cone w/
Chrome Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC136
Adjustable Gimbal White Cone w/
White Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC137SL
Adjustable Gimbal Brushed
Nickel Cone w/ Brushed Nickel
Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC136M1 (shown)
Adjustable Gimbal White Cone w/
Brushed Nickel Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1



LC136M2 (shown)
Adjustable Gimbal White Cone w/
Chrome Trim
4-5/8" sq. (117 mm)
Housing Lamp Wattage Louver
LVITX MR16 75W LCL1

2" Color Filters for MR16

CF1	Clear Lens
CF2	Spread Lens
CF3	Medium Blue Filter
CF4	Medium Red Filter
CF5	Medium Green Filter
CF7	Yellow Filter
CF8	Pink Filter
CF9	Linear Spread
CF10	UV Filter
CF11	Frosted Lens
CF12	Medium Amber Filter

Capri Lighting reserves the right to make changes without notice.©2009