

3ALVR

3" Micro Recessed Remodel Downlight - Low Voltage

Catalog Number: _____

Type: _____

Project: _____



Description

Thermally protected, small aperture low voltage recessed housing for use with up to 50 watt MR16 lamp in remodel applications. c/ETL Listed for through branch wiring and damp location.

Features

- Magnetic transformer ensures properly controlled voltage to lamp maximizing lamp life.
- Thermal protection standard.
- MR16 50 watt maximum.
- c/ETL listed for damp locations and through branch circuit wiring.

CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: 3ALVR-3A65WH

Housing	Trims (choose only one)	3A70SB	Satin Brass w/White Flange	3A50SB	Satin Brass Slot
3ALVR		3A70BRZSL	Bronze w/Bronze Flange	3A50CPR	Copper Slot
	3A65WH	3A70CPRSL	Copper w/Copper Flange	3A50BRZ	Bronze Slot
	3A65BK	3A70BRNSL	Brushed Nickel w/Brushed Nickel Flange	3A50BRN	Brushed Nickel Slot
	3A65BRZSL	3A45WH	White Gimbal	3A20BKSL	Black Baffle Wall Wash
	3A65BKSL	3A45BK	Black Gimbal	3A20BK	Black Baffle Wall Wash w/White Flange
	3A70CLR	3A45CPR	Copper Gimbal	3A20WH	White Baffle Wall Wash
	3A70GLD	3A45BRZ	Dark Bronze Gimbal	3A20BRN	Brushed Nickel Wall Wash
	3A70BK	3A45BRN	Brushed Nickel Gimbal	3A20BRZSL	Bronze Wall Wash
	3A70BKSL	3A45SB	Satin Brass Gimbal	3A30WH	White Eyeball
		3A50WH	White Slot	3A30BK	Black Eyeball
		3A50BK	Black Slot	3A30CPR	Copper Eyeball
				3A30BRZ	Bronze Eyeball
			3A30BRN	Brushed Nickel	



General Notes:

See Trims on reverse side of the sheet for lamp compatibility. Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

SPECIFICATIONS

- Housing** - Deep drawn, 20 gauge, single piece housing. Accommodates ceiling thickness from 1/2" to 1" thick. Ceiling opening 3". Accommodates lamp up to 50 watts MR16 12 volt lamps. Fits 2 X 6 joist construction.
- Plaster Frame**- Die-stamped 20 gauge galvanized steel.
- Socket**- Porcelain GU5.3 Base. Pre-wired with 18 gauge teflon 250 degree leads to junction box.
- Transformer**- Class H magnetic transformer attached to one cover of junction box. Transformers can be easily removed below ceiling.
- Junction Box** - Large 18 gauge galvanized steel with one snap-on cover and grounding pigtail. Knock-outs for 1/2" and 3/4" conduit. Integral cable clamp permits attachment of non-metallic Romex without the need of additional connectors. Meets all safety requirements of ETL and N.E.C.
- Thermal Protection** - Standard thermal protection device automatically takes the fixture out of service if temperature becomes excessive from overlampping or using the wrong lamp /trim combination.
- C/ETL Listed** - Certified for a maximum of 6 No.14 ga. 90 degree C through branch wiring conductors. Meets all safety requirements of ETL and N.E.C.

DIMENSIONS

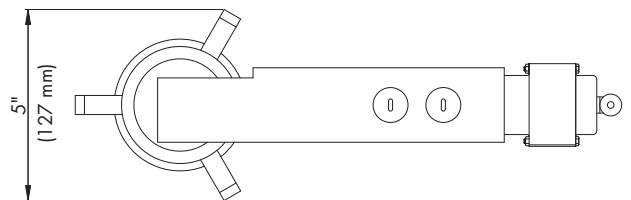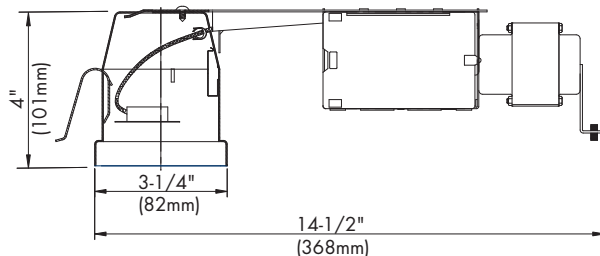

REV. 01/08

3" MICRO TRIMS - NEW CONSTRUCTION



3A65WH (Shown)
White Baffle w/White Flange

3A65BK
Black Baffle w/ White Flange

3A65BRZSL
Bronze Baffle w/Bronze Flange

3A65BKSL
Black Baffle, Self Flanged

35° Vertical Lamp Tilt
3-5/8" O.D. (92 mm)
50WMR16



3A70CLR (Shown)
Clear Reflector w/White Flange

3A70GLD
Gold Reflector w/White Flange

3A70BK
Black Reflector w/White Flange

3A70BKSL
Black Reflector w/Black Flange

3A70SB
Satin Bronze Reflector w/White Flange

3A70BRZSL
Bronze Reflector w/Bronze Flange

3A70CPRSL
Copper Reflector w/Copper Flange

3A70BRNSL
Brushed Nickel Reflector w/Brushed Nickel Flange

35° Vertical Lamp Tilt
3-5/8" O.D. (92 mm)
50WMR16



3A45WH (Shown)
White Gimbal

3A45BK
Black Gimbal

3A45CPR
Copper Gimbal

3A45BRZ
Bronze Gimbal

3A45BRN
Brushed Nickel Gimbal

35° Vertical Lamp Tilt
3-5/8" O.D. (92 mm)
50WMR16



3A50WH
White Slot

3A50BK
Black Slot

3A50SB
Satin Brass Slot

3A50CPR
Copper Slot

3A50BRZ
Bronze Slot

3A50BRN
Brushed Nickel Slot

35° Vertical Lamp Tilt
3-5/8" O.D. (92 mm)
50WMR16



3A20BKSL (Shown)
Wall Wash Black Baffle w/Black Flange

3A20BK
Wall Wash Black Baffle w/White Flange

3A20WH
Wall Wash White Baffle w/White Flange

3A20BRNSL
Wall Wash Brushed Nickel w/Brushed Nickel Flange

3A20BRZSL
Wall Wash Bronze w/Bronze Flange

35° Vertical Lamp Tilt
3-5/8" O.D. (92 mm)
50WMR16



3A30CPR (Shown)
Copper Eyeball

3A30WH
White Eyeball

3A30BK
Black Eyeball

3A30BRZ
Bronze Eyeball

3A30BRN
Brushed Nickel Eyeball

20° Vertical lamp tilt
4" O.D. (101 mm)
50WMR16

2" Color Filters for MR16

CF1	Clear Lens
CF2	Spread Lens
CF3	Medium Blue Filter
CF4	Medium Red Filter
CF5	Medium Green Filter
CF7	Yellow Filter
CF8	Pink Filter
CF9	Linear Spread
CF10	UV Filter
CF11	Frosted Lens
CF12	Medium Amber Filter
CLO	2" Honeycomb Louver

Custom colors are available on select trims. Please see the Decorative Trims link at www.caprilighting.com to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice. ©2008

RC4-3

CAPRI LIGHTING:
776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.dcolighting.com

THOMAS LIGHTING CANADA:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 800.268.0003
www.thomaslightingcanada.com

capri
LIGHTING